
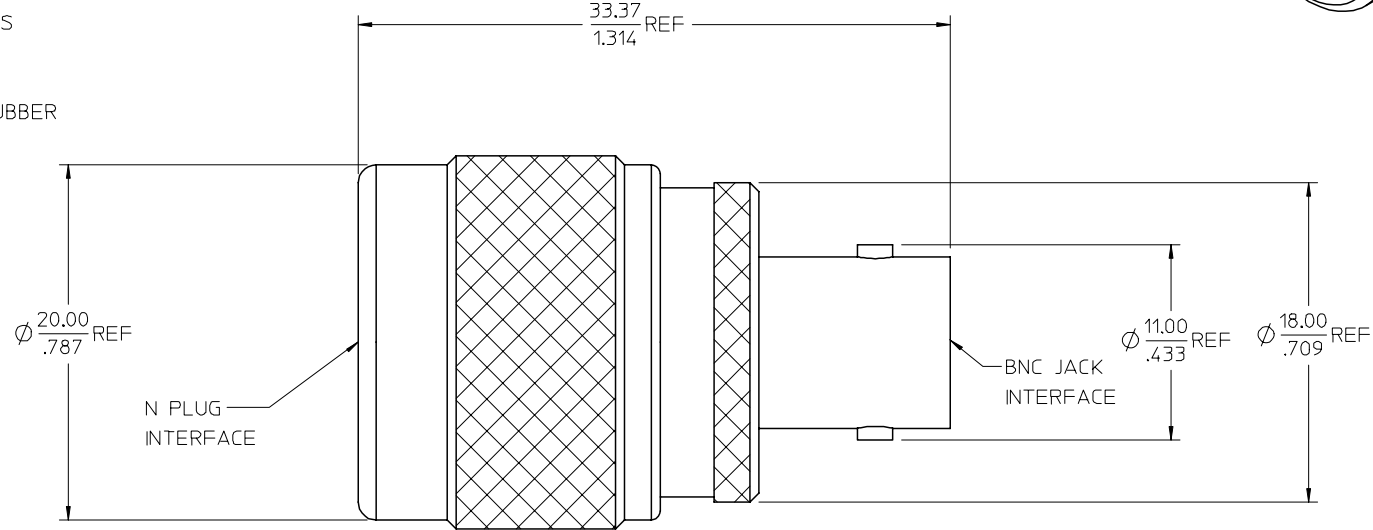


13 12 11 10 9 8 7 6 5 4 3 2 1

MATERIALS AND FINISHES

- BODY BRASS
PLATED NICKEL
- CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD
- INSULATOR TEFLON
- COUPLING NUT BRASS
PLATED NICKEL
- GASKET SILICONE RUBBER

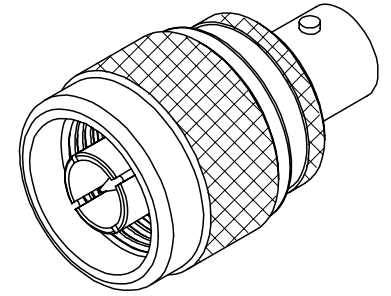

PART # 73386-1080

MIL-STD-348A, FIG. 301.2	BNC INTERFACE
MIL-STD-348A, FIG. 304.1	N INTERFACE
SPECIFICATION	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMS ARE MILLIMETERS AND ANGLES ARE DEGREES.

- $\frac{1}{16}$ ALL OVER.
- NO CHATTER OR NON-UNIFORM SURFACE FINISH ALLOWED.
- PARTS TO BE FREE OF BURRS & SHARP EDGES 0,13(0,05) MAX BREAK.
- EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT.
- DIAMETERS TO BE CONCENTRIC WITHIN 0,08(0,03) TIR.

CHG: DIM 33.37
WAS 33.80
CONTACT MATERIAL
WAS BRASS

FC NO: URF2006-0113
DRWN: JMASTRAND 2005/09/09
CHKD: JMASTRAND 2005/09/09
APPR: JMLENER 2005/09/09

REVISION
A1

QUALITY SYMBOLS

$\nabla=0$

$\nabla=0$

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .010	± .0004
3 PLACES	± .015	± .0006
2 PLACES	± .020	± .0008
1 PLACE	± .030	± .0012

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY	DATE
JM	2005/08/24
CHECKED BY	DATE
JM	2005/08/24
APPROVED BY	DATE
JDW	2005/08/24
MATERIAL NO.	
733861080	

SCALE

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

TITLE

BSA, N PLUG TO BNC JACK
STRAIGHT, 50 OHMS
EWR-2891, BSA-NP/BNCJ

MOLEX MOLEX INCORPORATED

DOCUMENT NO.

SD-73386-108

SHEET NO.

1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

12 11 10 9 8 7 6 5 4 3 2 1